


LOOX5 12V LED 2034 READING LIGHT, USB CHARGING

The flexible LED 2034 light is not only a directional spot light but also a USB charger for a smart phone or tablet. Would be equally suitable for a home office or bedroom.



Loox5 12V LED 2034 flexible reading light with USB

5

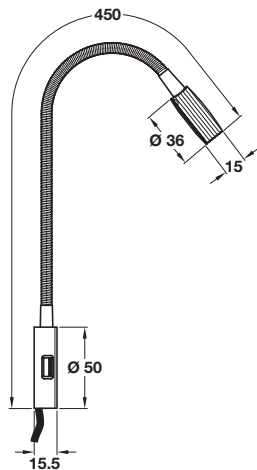

- > For surface mounting
- > 2x integrated USB ports
Output voltage: 5V
Output current: 2x 1A
- > Switch with 3 positions - off, 50% light, 100% light
- > Voltage: 12V. Wattage: max. 17W
- > Degree of protection: IP20
- > With 2.0 m lead with Loox5 12V connector
- > Aluminium
- > Order qty: 1 pc

Lighting: Loox5 LED

Distance	90°	4000 K
250 mm		650 Lx
500 mm		163 Lx
750 mm		72 Lx
1000 mm		40 Lx

Output:	4000 K
Light colour:	Cool white
Wattage (W):	Max. 17
Energy efficiency:	A+
Number of diodes:	3
Light output (Lm):	105
Efficacy (Lm/W):	70
Colour Rendering Index:	82

! In order to make optimum use of the USB charging station, a driver with at least 20W must be used

YOU ALSO NEED:

DRIVER
Page 5.156

OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181

5 12V
IP20

Fixings included

Finish	4000 K
Chrome-plated	833.70.237
Black	833.70.238