


IXCONNECT VARIANTOOL-N DRILLING JIG

- > For drilling Ø 3 or 5 mm holes consistently at 32 mm intervals (Ø 8 mm and 10 mm dowel holes, not included)
- > The jig allows for an inset distance from the front carcase edge of 37 mm and from the back edge of 69 mm
- Integral sliding positioning tabs ensure consistent drilling locations
- An ideal addition to the other Unitool drilling jigs, for drilling series of holes in a line or groups of holes according to System Varianta 32





The drilling jig is moved and fixed wth the locating pin for longer rows of series drilled holes.

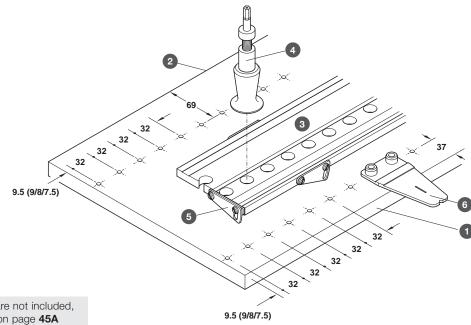

- Front edge of cabinet
- 2 Rear edge of cabinet
- 3 Profiled aluminium rail
- 4 Depth gauge (not included)
- 5 Stop plate
- 6 Marking gauge (not included)




reserve the right to alter specifications without notice

TCH TECHNOLOGY 2018, © Häfele U.K. Ltd 2018. Dimensional data not binding. We

Depth and marking gauge are not included, additional parts are shown on page **45A**

Variantool-N drilling jig



- > Set consists of:
 - 1x Rail, 563 or 1172 mm length, profiled aluminium with non slip coating, for 37 holes at 32 mm intervals (other system intervals available on request)
 - 8x Adjustable stop plates for edge distances of 37 and 69 \mbox{mm}
 - 2x Locating pins for Ø 3 and Ø 5 mm holes
 - 1x Surface drilling jig, 550 x 35 x 10 mm
- > Order qty: 1 set



Variantool-N drilling jig with profiled rail:	Cat. No.
563 x 120 x 10 mm	001.27.017
1172 x 120 x 10 mm	001.27.016



- > Red jig basic jig and supplementary jigs for Minifix 12 and 15 housings, Rafix and Maxifix are shown on pages 42-43
- > Unitool drilling jig for Minifix 12 and 15 housings, Rafix, Pushfix, Onefix TAB and TAB 18 connectors can be found on pages 46-47

PAGE AMENDED 15.11.18/1