


# LOOX5 12V LED 2063 SILICONE FLEXIBLE STRIP LIGHT MONOCHROME, 8 MM

The LED 2063 is a flexible strip light encased in a silicone sleeve with an IP44 rating, making it suitable for use in zone 2 or 3 areas, such as the area around a kitchen or bathroom sink which are subject to splashing. IP44 rated leads and end cap must also be used, to be ordered separately. Comes in two lengths - 5 m strip with 300 LEDs or 15 m with 900 LEDs with 4.8W per metre.



## Loox5 12V LED 2063 silicone flexible strip light, 8 mm

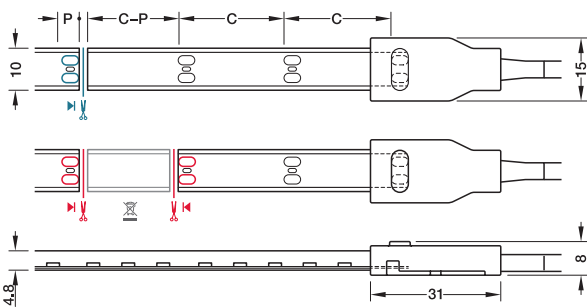

— Cut LED strip light to length (one contact side remains on the remainder piece; reusable)

— Connect LED strip lights (two contact sides required)

C = section length: 50 mm  
P = length of contact surface: 4.0 mm

Distance	120°	2700 K	3000 K	4000 K	5000 K
250 mm		920 Lx	960 Lx	975 Lx	1010 Lx
500 mm		390 Lx	410 Lx	415 Lx	425 Lx
750 mm		215 Lx	225 Lx	230 Lx	235 Lx
1000 mm		135 Lx	140 Lx	145 Lx	145 Lx

The values apply to a strip light length of 1 m



Silicone stripper tool for LED strip lights, see page 5.172



- > Maximum strip length is dependant on driver wattage capacity, shown on page 5.156
- > Maximum recommended strip light length for optimum visual light output: 6.0 m
- > Lead and end clip must be ordered separately; IP44 rated shown on page 5.172, IP20 rated shown on page 5.171

- > Equipped with high quality Samsung LEDs
- > For surface mounting, self adhesive, 5 or 15 m length
- > Can be shortened every 50 mm
- > Voltage: 12V. Wattage: 24 or 72W (4.8W per metre)
- > Degree of protection: IP44 / IP20 dependent on choice of lead
- > Dimmable
- > Lifetime: >50,000 h
- > Width: Strip: 8 mm, silicone sleeve: 10 mm
- > Height: Strip: 1.3 mm, silicone sleeve: 4.8 mm
- > Lead not included, must be ordered separately
- > White plastic with silicone sleeve
- > Order qty: 1 pc (roll of 5 or 15 m length)

Output:	2700 K	3000 K	4000 K	5000 K
Colour deviation*	- 30 K	- 40 K	- 50 K	- 80 K
Light colour:	Warm white		Cool white	
Wattage (W):	4.8W per meter			
Energy efficiency:	A+	A+	A+	A+
Number of diodes:	60 per meter			
Light output (Lm/m):	415	440	455	460
Efficacy (Lm/W):	86	92	95	96
CRI Ra / R9:	>90 / >50			

\*Minimal colour deviations due to silicone sleeve

Length	2700 K	3000 K	4000 K	5000 K
5 m	833.74.344	833.74.345	833.74.346	833.74.347
15 m	833.74.348	833.74.349	833.74.350	833.74.351

### YOU ALSO NEED:

**DRIVER**  
Page 5.156

**LEAD**  
Page 5.172

**SWITCH**  
Page 5.160-166

**OPTIONAL ACCESSORIES**  
Pages 5.158-159, 5.167-168, 5.178-181

PAGE AMENDED  
25.02.20/1