

PUSH KNOB LATCH



PKL-08





PAT


- Door Thickness: 15 mm~30 mm (19/32"~ 3/16"), for doors 13mm thick, use a 2mm plastic spacer (sold separately).
- Knob and Latch combined.
- Door will be locked when knob is pushed in.
- Holding Force : 10kg (22 lbs)
- Non-handed
- Note: To avoid damage to the unit, do not activate the latch before closing the door.



- *Please specify latch body color when ordering.
- *Available in white (WHT) or black (BLK).
- *Latch body and push knob sold separately.

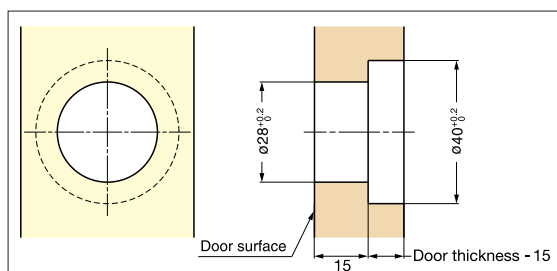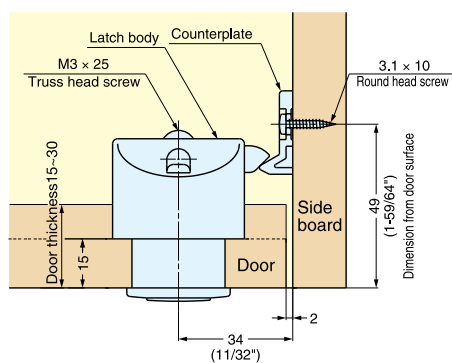

Bore Dimensions

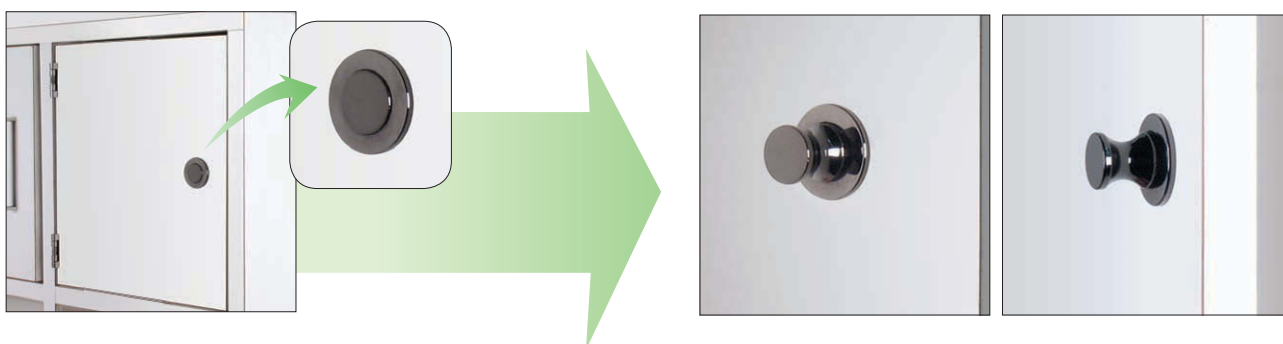

For both inset and overlay door.

Step 1: When the door is closed, the latch is engaged.

Step 2: Push the knob to flush position to lock the latch.

Step 3: Push the knob again to out position to unlock the latch.

Item No.	Part Name	Finish	Weight (g)	Box (pcs)	Carton (pcs)
PKL-08/GA	Push Knob	Gold	63	20	200
PKL-08/CR		Chrome			
PKL-08/BN		Black Nickel			
PKLW	Latch Body	White	30	20	200
PKLSW		Snow White			
PKLB		Black			
PKL-Spacer/WHT	Spacer	White	2	500	-
PKL-Spacer/BLK		Black			-

Part Name	Material	Finish
Latch Body	ABS	Gold, Chrome, Black Nickel
Push Knob	Zinc Alloy	
Counterplate	ABS	