

PUSH KNOB LATCH



TEST
METHOD

3×16
3×20
STEEL


TLP



- Knob and latch combined
- Door Thickness: 19mm - 30mm (3/4" - 1-3/16")
- Door will be locked when knob is pushed in
- Has a deadbolt to securely lock the door
- Holding force: 20 kg (44 lbs)
- Non handed
- Order Latch Body (TLP- LBM WHT) and Push Knob (TLP-XX) for complete set.

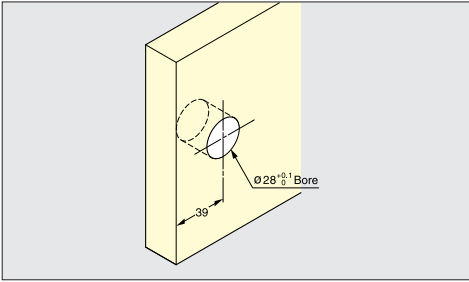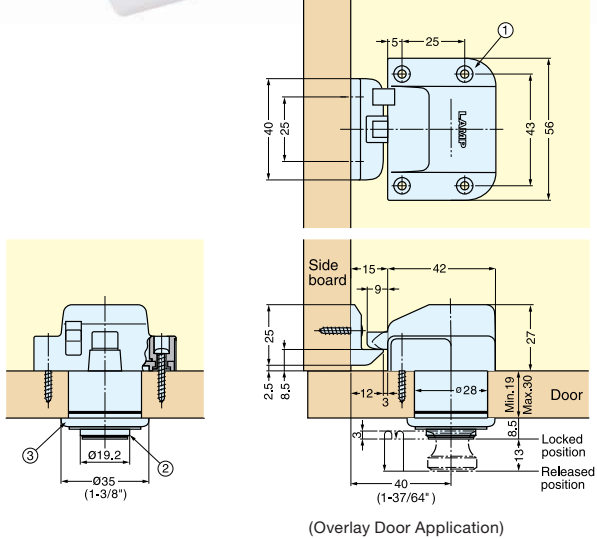

Bore Dimensions (Inset Door Application)

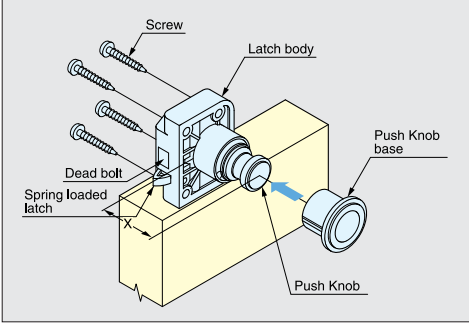

Installation



	No.	Part Name	Material	Finish	
				Knob	Latch
	①	Latch Body	Polyamide	Satin Gold(SG) White Bronze(WB) Gold(G) Chrome(CR)	White
	②	Push Button	Brass		
③	Push Button Base	Zinc Alloy			

Item No.	Part Name	Holding Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
TLP-SG	Push Knob and Base	20 (44 lbs)	77	25	200
TLP-WB					
TLP-G					
TLP-CR					
TLP-LBM WHT	Latch Body		33	10	100

Supplied with 2 threaded screws (L=24mm and 30mm).

Threaded screw	Door Thickness	Dimension X
L=24	19 (3/4")	40.5 (1-19/32")
	20 (25/32")	41.5 (1-5/8")
	21 (53/64")	42.5 (1-43/64")
	22 (7/8")	43.5 (1-23/32")
	23 (29/32")	44.5 (1-3/4")
	24 (15/16")	45.5 (1-51/64")
L=30	25 (63/64")	46.5 (1-53/64")
	26 (1-1/32")	47.5 (1-7/8")
	27 (1-1/16")	48.5 (1-29/32")
	28 (1-3/32")	49.5 (1-61/64")
	29 (1-9/64")	50.5 (1-63/64")
	30 (1-3/16")	51.5 (2-1/32")