





EXTRACT/SUPPLY AIR VALVE

Description


The Domus extract & supply valve is available in 2 different versions and 3 different sizes. The 136-24, -25 & -26 come supplied with a spigot and grab ring for easy installation in a suspended ceiling, whereas the 136-04, -05 & -06 come without for installation directly into the ducting. Each valve is manufactured from gloss white HIPS and has an aerodynamic disc valve design to help distribute the air evenly. The open area of the valve is adjustable by means of a steel threaded bar and can be locked in position with the supplied locking nut.




Product code	D	Dimensions (mm)				Air pass (m ²)	Damper normal pitch (mm)
136-04 & 136-24	100	D1	D2	H	H1	0-0.006	20
136-05 & 136-25	125	110	166	58	20	0-0.008	22
136-06 & 136-26	150	128	200	58	20	0-0.009	23

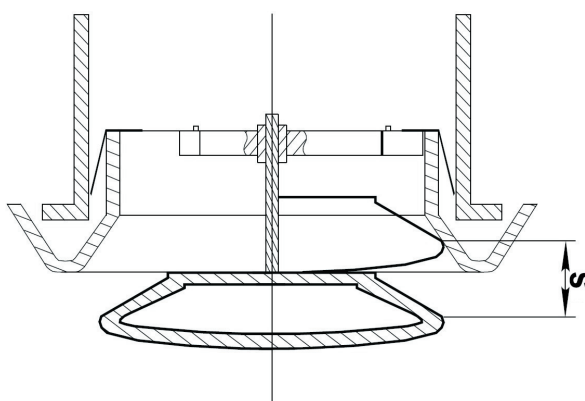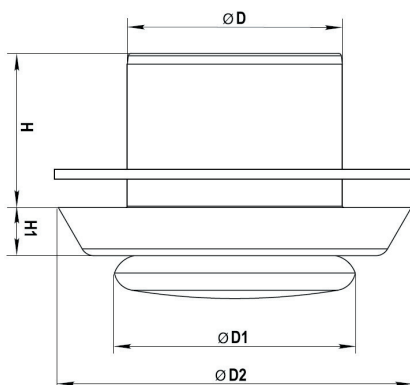


See graphs below for pressure losses at various values of 's'

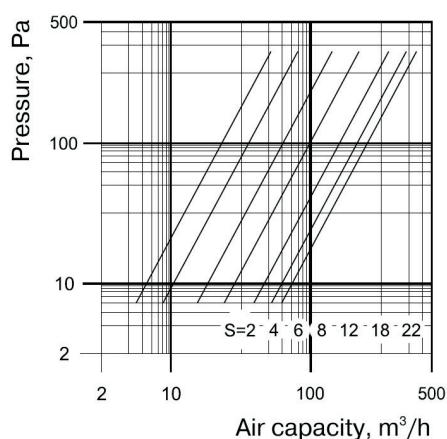

136-04 & 136-24 (100mm)

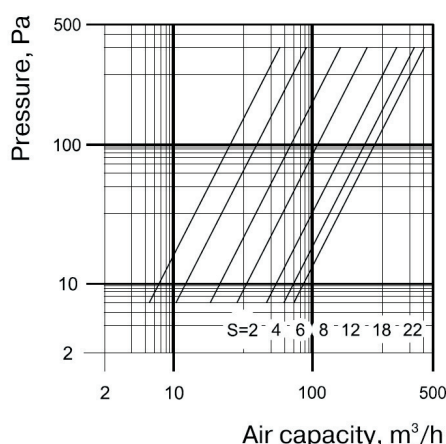

136-05 & 136-25 (125mm)

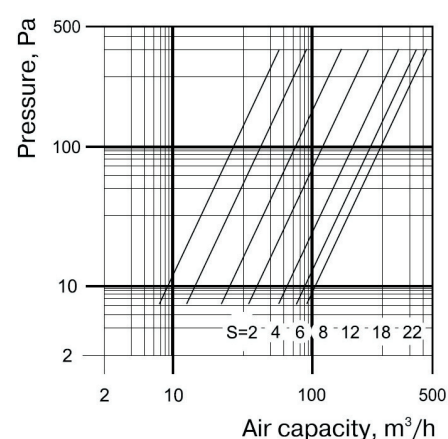

136-06 & 136-26 (150mm)

UK tel: 08443 715523
 UK fax: 08443 715524
 International tel: +44 (0) 1302 348878
 International fax: +44 (0) 1302 348879
 Email: vent.info@polypipe.com
 Web: www.polypipe.com/ventilation

Polypipe Ventilation
 Sandall Stones Road
 Kirk Sandall Industrial Estate
 Kirk Sandall, Doncaster
 DN3 1QR
 United Kingdom

