


CORNER FASTENER (W/LOCK)



STF-C64A, B




STF-C64A PAT.P

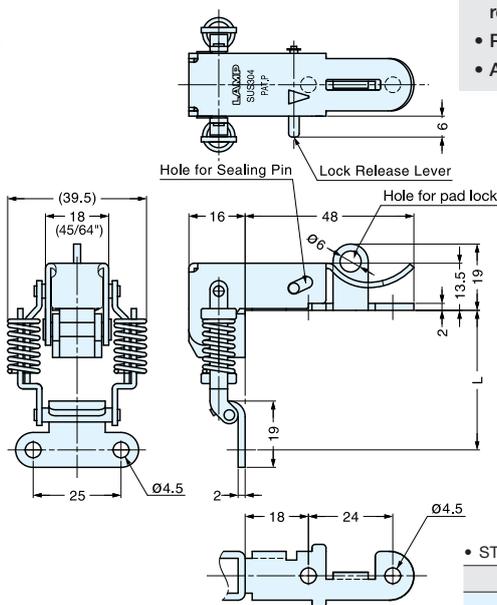

- Designed to allow front operation.
- Locks when fastened to prevent accidental release.
- Pull lever and lift latch to open.
- Available with or without spring.

STF-C64B
(To be used with rubber gasket)



L (mm)	Clamping Force kgf±1.5 (lbs±3.3)
40	0
41	6.0 (13.2 lbs)
42	7.3 (16 lbs)
43	8.6 (19 lbs)
44	9.9 (21.8 lbs)

*Maximum "L" dimension is 44mm.


Item No.	Spring	Weight (g)	Box (pcs)	Carton (pcs)
STF-C64A	With	66.5	15	210
STF-C64B	Without	60		

Material	Finish
304 Stainless Steel	Polished


CORNER FASTENER HINGE (W/LOCK)






STH-C64

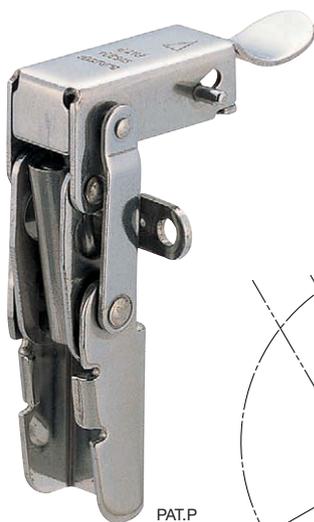

PAT.P



- Compresses cover to achieve better sealing.
 - Works with STF-C64 fastener.
 - To be used with rubber gasket.
 - Designed to allow front operation.
 - Locks when fastened to prevent accidental release.
 - Pull lever and lift latch to open.
- Door size: W300 x H400 /pair
Door thickness: t = 24mm ~ 28mm
Door weight: Max. 2.8 kg (6.1 lbs) /pair

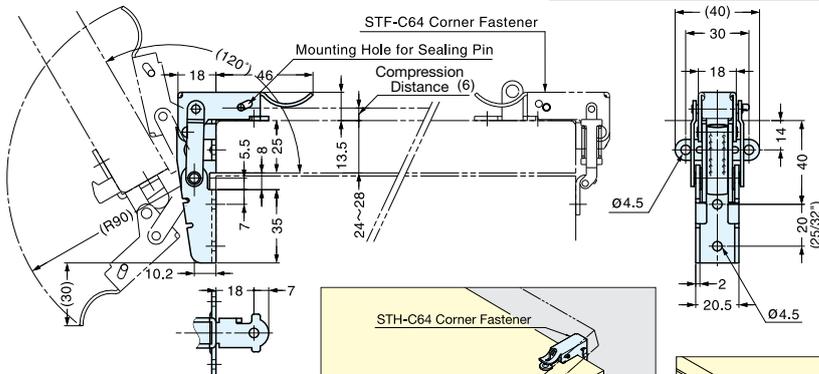

Item No.	Weight (g)	Box (pcs)	Carton (pcs)	Material	Finish
STH-C64	90	10	140	304 Stainless Steel	Polished