




CONCEALED HINGE (CLIP-ON)



HT-160T



- 95° opening concealed hinge.
- Door opens without interfering with adjacent cabinet doors.
- Ideal when two doors are installed close together.
- Clip-on feature allows easy door installation/removal.

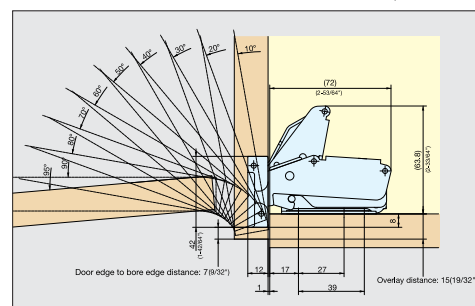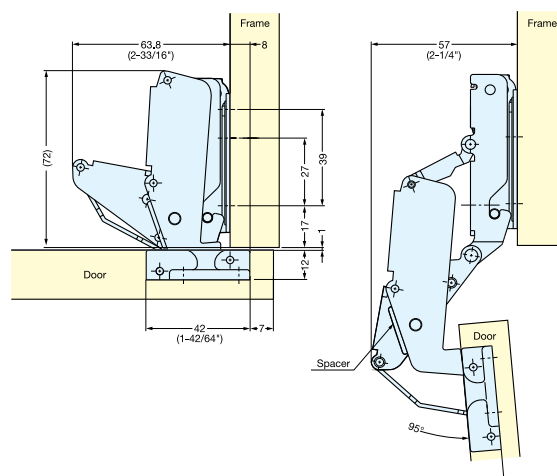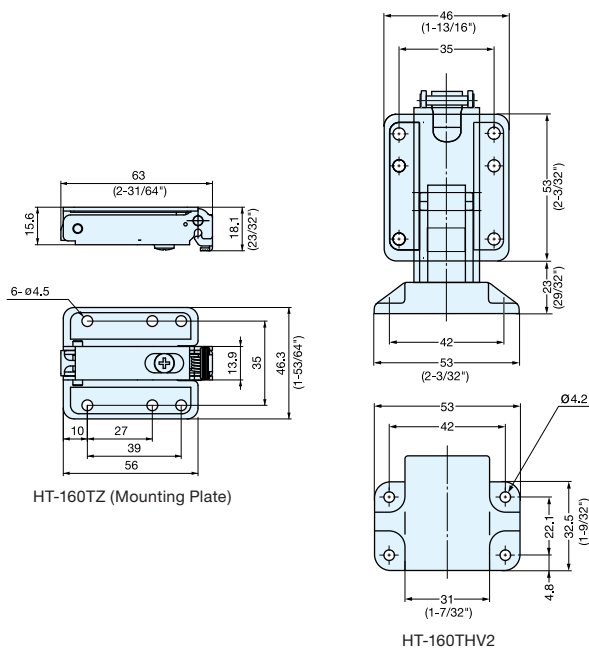


Item No.	Weight (g)	Carton (pcs)
HT- 160THV2	205	100
HT- 160TZ	68	200

Item No.	Part Name	Material	Finish / Color
HT-160THV2	Plate	Zinc Alloy	Nickel
	Body	Steel	
		Spacer	Polycetal
HT-160TZ	Mounting Plate	Steel	Nickel

CONCEALED HINGE (FACE MOUNT)

T-90-200

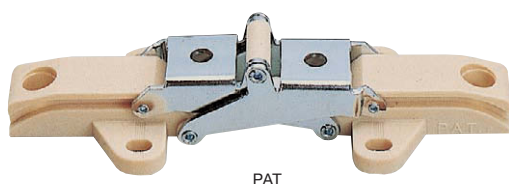

PAT


- Opening Angle 90 °
- Door Thickness : 15-18 mm
- Usage both in Overlay or Inset
- Without Catch

Item No.	Type	Carton (pcs)
T-90-200	Free Swinging	200

Hinge side opening clearance chart

Door Thickness (D)	Coverage (E)			
	15	16	17	18
15	1.1	0.5	0.0	0.0
16	2.0	1.4	0.8	0.2
17	2.9	2.3	1.7	1.1
18	3.8	3.2	2.6	2.0
	Hinge Side O.C.(B)			

Part Name	Material	Finish/Colour
Body	Polyamide	Ivory
Arm	Steel	Chrome

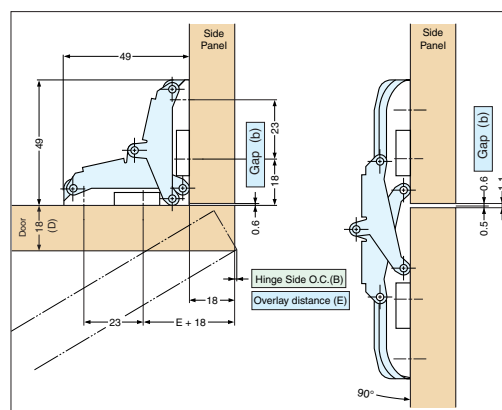

Door thickness (D) and Gap (b)

Door Thickness (D)	15	16	17	18
Gap (b)	0.2	0.3	0.5	0.6